


SIDEWALK WIDTH VARIES
(4' MINIMUM)

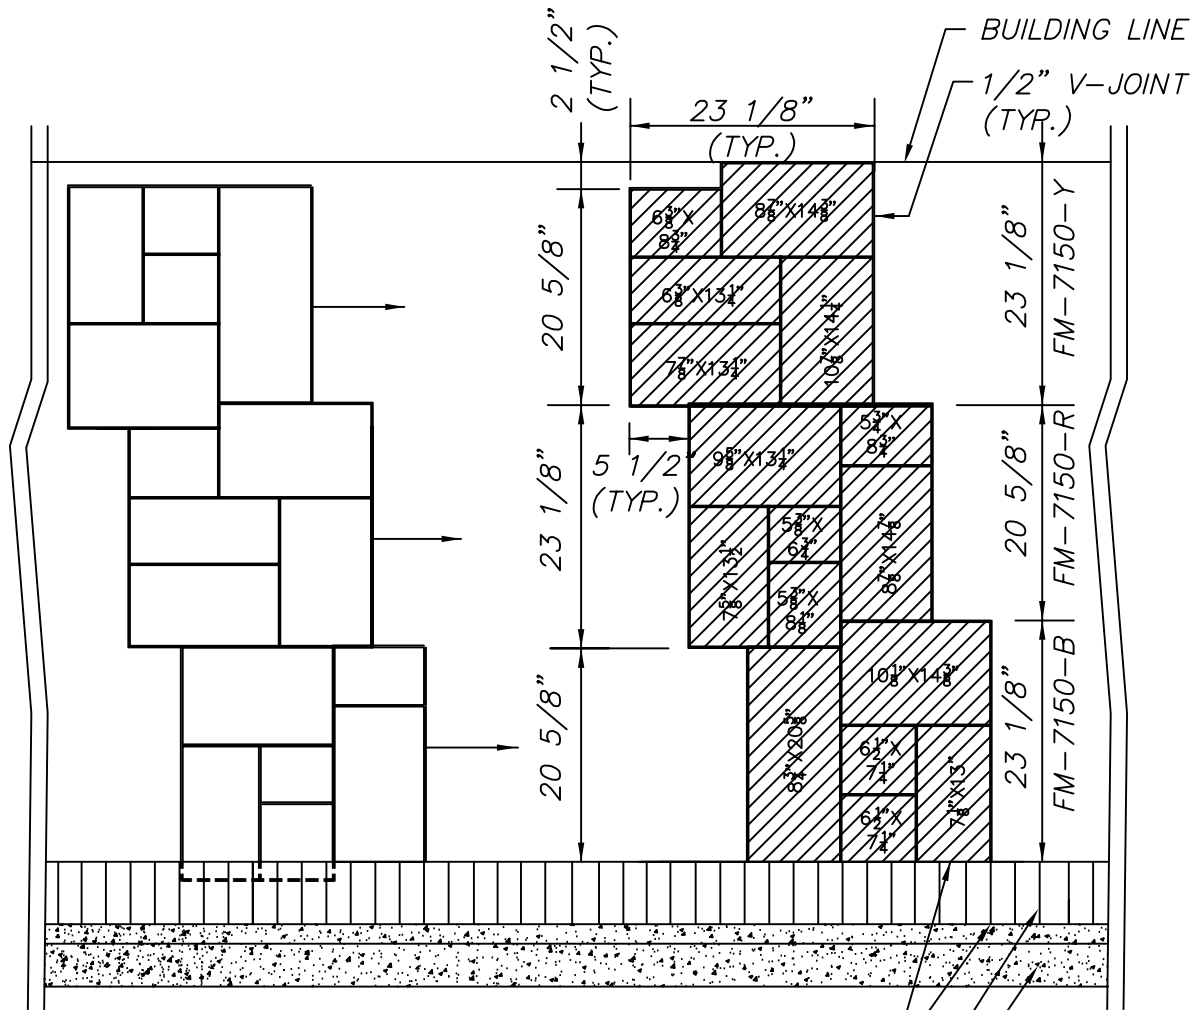

NOTES:

1. DIMENSION TOLERANCES:

- 1.) LENGTH - $1/4'' \pm 1/8''$
- 2.) WIDTH - $3/8'' \pm 1/8''$
- 3.) DEPTH - $1/4'' \pm 1/8''$

2. SIZES OF DESIGN AT END/EDGE VARY AND/OR ADJUSTED TO FIT THE LENGTH AND WIDTH OF SIDEWALK, AND WILL REQUIRE HAND TOOLING.

3. FINAL ALIGNMENT OF THE PATTERNS WILL BE REVIEWED AND APPROVED BY THE CITY DURING TEST POUR.

4. PATTERN DESCRIPTION: PATTERN IS FORM OF RECTANGULAR STONES IN VARIOUS SIZES LAID IN A RANDOM MANNER. THE SIDES OF THE STONES VARY FROM $5\frac{1}{4}''$ TO $20\frac{5}{8}''$. EDGES ARE BEVELED FORMING A V-SHAPE GROOVE WITH THE APPEARANCE OF UNGROUTED JOINT, $1/2''$ WIDE AND $1/4''$ DEEP. OUTER BEVELED EDGES ARE $1/4''$ WIDE WHICH MATCH THE INSIDE JOINTS WHEN TOOLS ARE JOINED. THE COMPLETED PATTERN IS FORMED BY THE USE OF 3 TOOLS, B, R AND Y, EACH WITH DIFFERENT RANDOM ARRANGEMENT OF STONES.

NO.	REVISION	DATE	STANDARD DETAILS FOR PUBLIC WORKS CONSTRUCTION	SECTION	RENO
			"BRICKFORM RAFCO" TYPICAL ASHLAR SLATE STAMP PATTERN DIMENSIONS	DRAWING NO.	R-104E (312)
				DATE	01/04
				PAGE	108
APPROVED BY:	G.S.	01/04			